



3-LED NARROW PROFILE LIGHTHEAD



FEATURES

- 0.62" (15.79mm) Lowest narrow profile with remarkable Class 1 output.
- Universal Angle Adjustable Bracket, mounting virtually anywhere.
- Brand-new unique optical design for efficient and powerful output.
- ECE R10 EMC Compliance.
- Long life LEDs rated to 100,000 hours of operation.
- Non-volatile memory recalls last flash pattern used at power up.
- Multi-units synchronization in simultaneous or alternating flash.
- Reverse polarity protection.
- Weatherproof and vibration resistant design for internal or external use.
- Aluminum base for best heat dissipation.

SPECIFICATIONS

Meets: SAE J595 Class1 , CA13 , ECE R10 , IPX8

Bulb: High-power LED x 3pcs

Warning Patterns: 12 Flash Patterns

Operating Voltage: 12~24VDC

Avg. Current: 0.4A @12VDC / 0.2A @24VDC
(varies with flash pattern)

Avg. Power: 4.74 Watts (varies with flash pattern)

Max. Current: 0.79A @12VDC / 0.4A @24VDC


Max. Power: 9.48 Watts

Wires: Red-Vcc : 25cm (20AWG)
Black-GND : 25cm (20AWG)
Yellow-Sync & Functions : 25cm (20AWG)

Fuse Recommended: 1A

Available in: RED , BLUE , AMBER , WHITE

DIMENSIONS

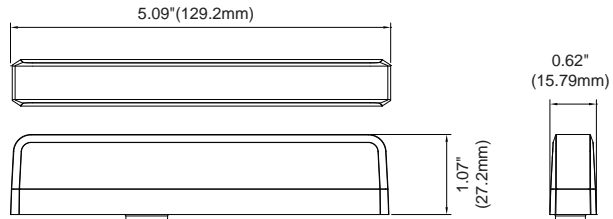

PART NO.



- M59-1013R-00R (SAE, RED)
- M59-1013B-00R (SAE, BLUE)
- M59-1013C-00R (SAE, AMBER)
- M59-1013W-00R (SAE, WHITE)
- M59-3013R-00R (R10, RED)
- M59-3013W-00R (R10, WHITE)
- M59-3013C-00R (R10, AMBER)
- M59-3013B-00R (R10, BLUE)

FLASH PATTERN


Flash Patterns			
1	Double [2Hz]	9	Double [SAE]
2	Single [2Hz]	10	Triple [SAE]
3	Triple [2Hz]	11	Quad [SAE]
4	Quad [2Hz]	12	Quint [SAE]
5	Random	13	Ultra [SAE]
6	Steady	14	Single-Quad
7	Single [SAE, CA13]	15	Single H/L
8	Mega	16	Single-Triple-Quint

MOUNTING BRACKETS

Universal Bracket (Angle-Adjustable)



L-Bracket (Front)



L-Bracket (Rear)

