

# Mini Stealth

## 3-LED LIGHTHEAD (Surface Mount)



MS3BS

### FEATURES

- Super low profile for discreet mounting
- Multi-Voltage Input 12~24VDC
- Built-in 12 Selectable Flash Patterns
- LEDs rated to 100,000 hours of operation.
- Non-volatile memory recalls last flash pattern used at power up.
- Multiple units are synchronizable and can flash simultaneously or alternately.
- Reverse polarity protection.
- Weatherproof and vibration resistant design for internal or external use.
- Aluminum base for heat dissipation.

### SPECIFICATIONS

**Meets:** SAE, CA13, e13

**Bulb:** 1W LED x 3pcs

**Warning Patterns:** 12 Flash Patterns

**Operating Voltage:** 12~24VDC

**Avg. Current:** 0.2A @12.8VDC / 0.11A @24VDC  
(varies with flash pattern)

**Avg. Power:** 2.7 Watts (varies with flash pattern)

**Max. Current:** 0.4A @12.8VDC / 0.22A @24VDC

**Max. Power:** 5.5 Watts

**Wires:** Red-Vcc: 20cm (20AWG)

Black-GND: 20cm (20AWG)


Yellow-Flash Patterns & Sync: 20cm (20AWG)

**Fuse Recommend:** 3A

**Multi-Unit Synchronization:** Over 15

**Available in:** RED, BLUE, AMBER, WHITE

### DIMENSIONS

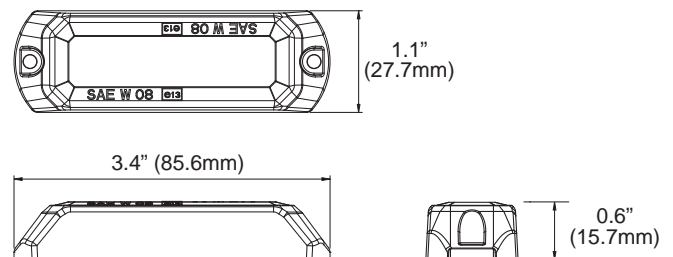

### FLASH PATTERN

FP#	Flash Patterns		
0	Random	6	Quad
1	Steady	7	Quint
2	Single	8	Ultra
3	Mega	9	Single-Quad
4	Double	10	Single H/L
5	Triple	11	Single-Triple-Quint