

LP3 LED PAD

3-LED LIGHT HEAD (Surface Mount)



FEATURES

- 0.26" (6.6mm) Super low-profile thickness for discreet mounting.
- Self-Adhesive backing for quick simple mounting.
- SAE Class 1 high power output.
- Multi-Voltage Input 12~24VDC.
- Built-in 12 selectable flash patterns.
- Long life LEDs rated to 100,000 hours of operation.
- Non-volatile memory recalls last flash pattern used at power up.
- Multi-units synchronization in simultaneous or alternating flash.
- Reverse polarity protection.
- Weatherproof and vibration resistant design for external or internal use.
- Aluminum base for efficient heat dissipation and maximum durability.

SPECIFICATIONS

Meets: SAE J595 Class1(R,A,B,W), CA13(R,B,A), ECE R10, IPX8

Bulb: High-power LED x 3pcs

Warning Patterns: 12 Flash Patterns

Operating Voltage: 12~24VDC

Avg. Current: 0.27A @12VDC / 0.14A @24VDC
(varies with flash pattern)

Avg. Power: 3.25 Watts (varies with flash pattern)

Max. Current: 0.54A @12VDC / 0.27A @24VDC

Max. Power: 6.5 Watts

Wires: WhiteVcc : 20cm (24AWG)

Black-GND : 20cm (24AWG)

Brown-Flash Patterns & Sync : 20cm (24AWG)


Fuse Recommended: 1A

Multi-Unit Synchronization: Over 15 units

Available in: RED, BLUE, AMBER, WHITE

Warranty: 1 year

DIMENSIONS

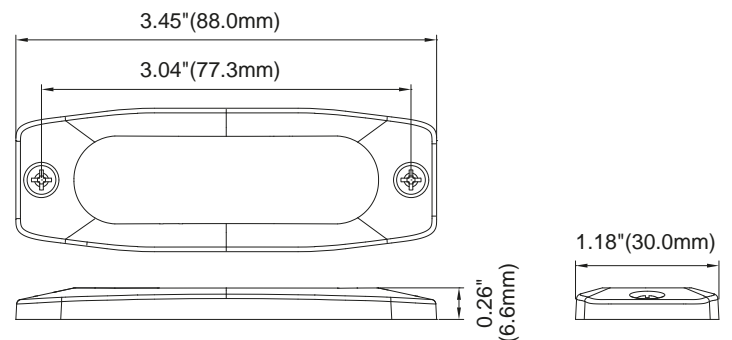

PART NO.

- 0213007 (M43-LP3-AC) (AMBER)
- 0213008 (M43-LP3-BC) (BLUE)
- 0213009 (M43-LP3-RC) (RED)
- 0213010 (M43-LP3-WC) (WHITE)

FLASH PATTERN

FP#	Flash Patterns		
1	Random	7	Quad (SAE)
2	Steady	8	Quint (SAE)
3	Single (SAE) (CA13)	9	8 Flash (SAE)
4	Mega	10	Single-Quad
5	Double (SAE)	11	Single H/L
6	Triple (SAE)	12	Single-Triple-Quint