

SW830-2

Multi-purpose Switch



FEATURES

- 7 switches control panel with 3 x 0.2Amp and 4 x 0.1Amp outputs for auxiliary device power or function activation.
- 1 Programable Short Cut Button for quick activation of pre-set buttons.
- Backlit rubber touch buttons.
- Fully programable buttons in ON/OFF or momentary switch mode.
- European Siren Interlock compatible.
- 10 LED signal indicator for your lightbar or traffic director.
- 35 selectable icon stickers to clearly label your panel.

SPECIFICATIONS

Approval: ECE R10

Operating Voltage: 10~24VDC

Input Current: max 1.2A / min 0.01A

Output Voltage: 10~24VDC

Output Current: max 0.2A x 3 ports /
max 0.1A x 4 ports

Fuse Recommended: 1.5A @ Input

Storage Temperature: -40°C ~ 75°C

Operating Temperature: -30°C ~ 65°C

Cable: 120cm (22AWG) x 10 wires

RECOMMENDED RELAY SPECIFICATION (USER-SUPPLIED)

Input Voltage: 10~24 VDC


Input Current: < 200mA

PART NO.

- A03-22130-00R (8 SWITCH W/O RELAY, 1.2M CABLE, ECE R10)
- A03-22030-00R (8 SWITCH W/O RELAY, 1.2M CABLE)

DIMENSIONS

Control Panel

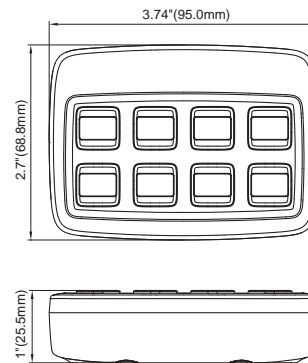

ICON STICKER

